

**Advanced OEM Laser Diode Driver
with Laser Power Control [LPC optional]**



Description:

The LDD-1137 is a specialized laser diode driver, able to precision-drive laser diodes in continuous and pulsed operation. New emerging technologies like eGaN FETs enable faster pulses, improved wave forms and better efficiency. A new processing core enables a faster processor connection to the powerful FPGA, more interfaces, more precise timing, additional functions and much more, while still maintaining a 1.5 mA resolution with much higher current and keeping a very low output ripple.

Equipped with optional light measurement circuitry, the LDD-1137-LPC can also be operated as a Laser Power Controller (LPC).

The LDD-1137 offers various safety features, including an input for laser diode temperature monitoring. They are fully digitally controlled; their firmware is upgradeable to offer various communication options and to meet specific customer requirements.

Features

Input Characteristics:

- DC Input Voltage: 18 to 75 V

Output Characteristics CW Operation:

- Voltage: up to 70 V
- Current: up to 75 A (>60 A for a prolonged period may require additional cooling)

Main Features:

- Lookup Table with up to 64000 Samples for arbitrary current wave forms
- Error: Ultra-Fast Switch-off for optimal LD protection
- Configuration / Diagnosis: on PC (via USB / RS485 / Ethernet / CAN)
- Dimensions (L x W x H): 118 mm x 171 mm x 48 mm
- Efficiency: >96 % (@ 50 % Duty cycle)
- Cooling: over Base Plate

Power Stage:

- Output Current: 0-75 A, ~0.2 % Ripple
Parallel operation of multiple devices on request
- Temperature Coefficient, Typ: 20 ppm/K
- CW Current Resolution: 1.5 mA

Pulse Version:

- Pulse Generation: CW Chopping
- Pulse Rise Time: < 1 μ s possible (Load dependant)
- Pulse Frequency: TBD

Interfaces:

- USB 2.0, Ethernet
- RS485, CAN, SPI, I2C
- Pulse Input
- Interlock (Enable)
- Analog Input

Laser Power Control (LPC): [LPC option]:

- CW LPC: Configurable PID
- Start-up phase: Fully parameterizable


Important Note:

The following features will be added with a future firmware update, but are not yet useable:

- CAN, I2C, SPI, Ethernet Interface
- LPC, temperature input

| Absolute Maximum Ratings | |
|---------------------------------|------|
| Supply voltage (DC) | 80 V |
| Supply current (DC) | 70 A |
| Output current | 80 A |

| Operating Ratings | |
|--------------------------|--------------------------|
| Temperature | 0 – 70 °C |
| Humidity | 5 – 95 %, non-condensing |



Warning

This is a high-power device.

Only operate this device in an enclosure.

Take necessary precautions to protect the operator.

Electrical Characteristics

Unless otherwise noted: $T_A = 25\text{ }^\circ\text{C}$, $U_{IN} = 24\text{ V}$, $R_{load} = 3.3\text{ }\Omega$

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|--------------------------------|---------------------|---|-----|-----|------|------------------|
| DC Power Supply Input: | | | | | | |
| U_{IN} | Supply voltage | | 18 | | 75 | V |
| U_{IN} Ripple | Ripple tolerance | U_{IN} never below U_{IN} min or above U_{IN} max | | | 300 | mV _{PP} |
| Output: | | | | | | |
| I_{OUT} | Current range | | 2* | | 75 | A |
| U_{OUT} | Voltage range | $V_{IN} = 75\text{ V}$ | 0 | | 70 | V |
| I_{OUT_RIPPLE} | Current ripple | $I_{out} > 2\text{ A}$ | | TBD | | mA |
| I_{OUT_RES} | Current resolution | Driver | | 1.5 | | mA |
| V_{OUT_LIMIT} | Output voltage | | | TBD | | V |
| P_{OUT} | Output power | $V_{LD} = 7\text{ V}$, additional cooling | | | 5000 | W |
| f_{CW} | Current change | For $L_{Load} < 100\text{ nH}$, higher f_{CW} are possible | | TBD | | kHz |
| I_{OUT_SLOPE} | Current slope limit | $I_{out} > 10\text{ A}$ | | TBD | | A/ns |
| System Characteristics: | | | | | | |
| $\eta_{50\%}$ | Power efficiency | @ 50 % load | | 96 | | % |
| $\eta_{100\%}$ | Power efficiency | @ 100 % load | | 98 | | % |

* Operation below this value is possible but the output current and measurement may show offsets outside of the specifications.

Platform Bus Connector (PBC) X7

Unless otherwise noted: $T_A = 25\text{ }^\circ\text{C}$

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|------------------------------------|-------------------------------|--------------------------|------|-----|-----------|----------|
| GPIO 1-8 Characteristics: | | | | | | |
| U_{IH} | Logic high input threshold | | 2.35 | | | V |
| U_{IL} | Logic low input threshold | | | | 0.9 | V |
| U_{IMAX} | Absolute limit input voltage | | -0.5 | | 3.6 | V |
| Output Characteristics: | | | | | | |
| U_{OH} | Logic high output voltage | | 2.9 | | | V |
| U_{OL} | Logic low output voltage | | | | 0.4 | V |
| R_S | Series Resistor | | | 100 | | Ω |
| Output Characteristics GND: | | | | | | |
| I_{max} | Absolute limit output current | Total GND Output (Fused) | | | ± 375 | mA |

| ESD Protection: | | | | | | |
|-----------------|-----|--|--|----|--|----|
| V _{PP} | ESD | IEC61000-4-2 Level 4, Contact Discharge | | 18 | | kV |

Auxiliary Communication and GPIOs (AUX) X10

Unless otherwise noted: T_A = 25 °C

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|--|----------------------------|--|------|-----|------|-------|
| Input Characteristics GPIO TTL 1 and 2: | | | | | | |
| U _{IH} | Logic high input threshold | | 4.7 | | | V |
| U _{IL} | Logic low input threshold | | | | 1.8 | V |
| U _{IMAX} | Maximum input voltage | | -0.5 | | 7 | V |
| Input Characteristics Analog In 1V: | | | | | | |
| V _{AN} | Input voltage range | Analog input | 0 | | 1 | V |
| BW | Bandwidth | Analog input | | 10 | | kHz |
| R _{IN} | Input Resistance | | | 10 | | kΩ |
| Input Characteristics Analog In 5V: | | | | | | |
| V _{AN} | Input voltage range | Analog input | 0 | | 5.3 | V |
| BW | Bandwidth | Analog input | | 10 | | kHz |
| R _{IN} | Input Resistance | | | 23 | | kΩ |
| Input Characteristics Analog In 10V: | | | | | | |
| V _{AN} | Input voltage range | Analog input | 0 | | 10 | V |
| BW | Bandwidth | Analog input | | 10 | | kHz |
| R _{IN} | Input Resistance | | | 37 | | kΩ |
| Output Characteristics GND: | | | | | | |
| I _{max} | Maximum output current | Total GND Output (Fused) | 0 | | ±375 | mA |
| Output Characteristics 5V: | | | | | | |
| I _{max} | Maximum output current | 5V Output (Fused) | 0 | | ±375 | mA |
| ESD Protection: | | | | | | |
| V _{PP} | ESD | IEC61000-4-2 Level 4, Contact Discharge | | 18 | | kV |

Mini USB Connector X15

Unless otherwise noted: $T_A = 25\text{ °C}$

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|-------------------------------|------------------------------------|-----------------|-----|-----|-----|-------|
| Input Characteristics: | | | | | | |
| V_{IORM} | Maximum Working Insulation Voltage | | | | 560 | V |

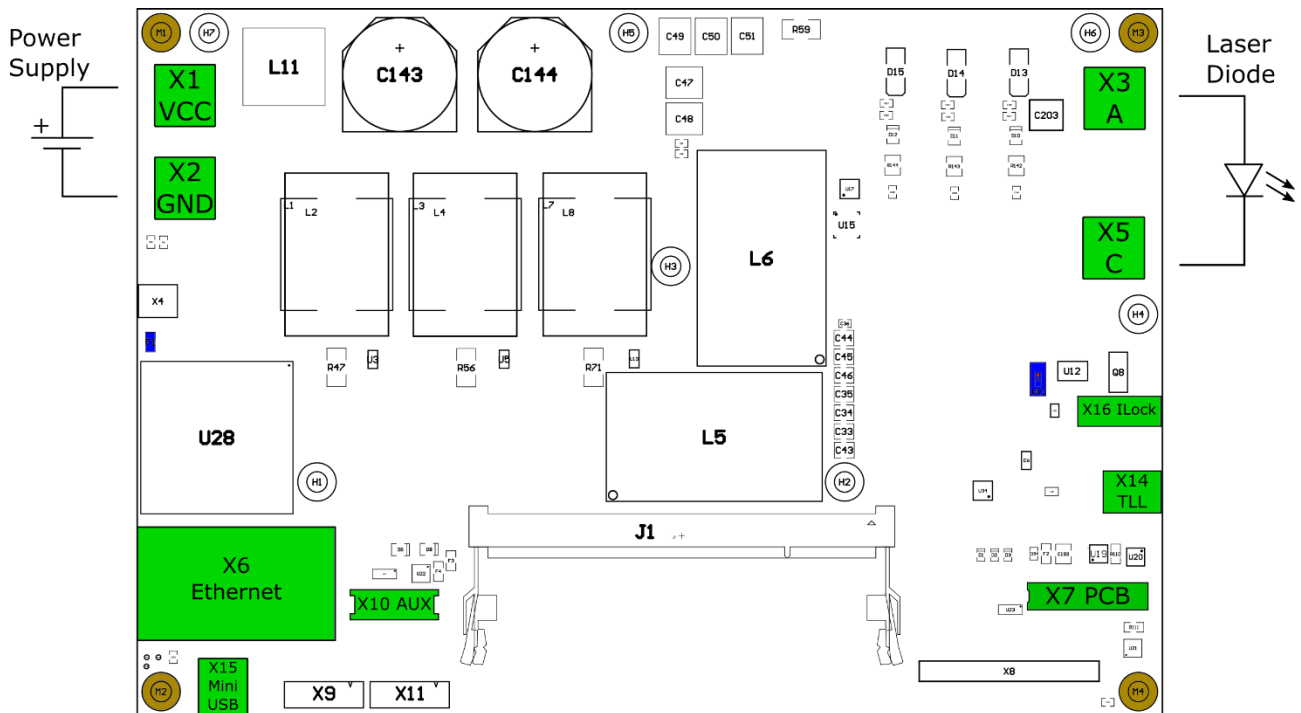
Interlock Connector X16

Unless otherwise noted: $T_A = 25\text{ °C}$

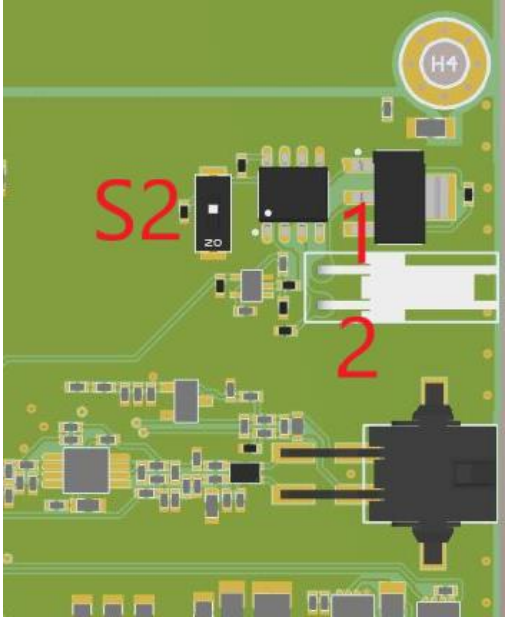
| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|---|--------------------------------------|---|-----|-----|-----|-------|
| Input Characteristics Interlock: | | | | | | |
| V_{IAct} | Interlock active input voltage range | Voltage range which is detected as active input | 3 | | 30 | V |
| V_{IORM} | Maximum Working Insulation Voltage | | | | 630 | V |

Connectors

Top view

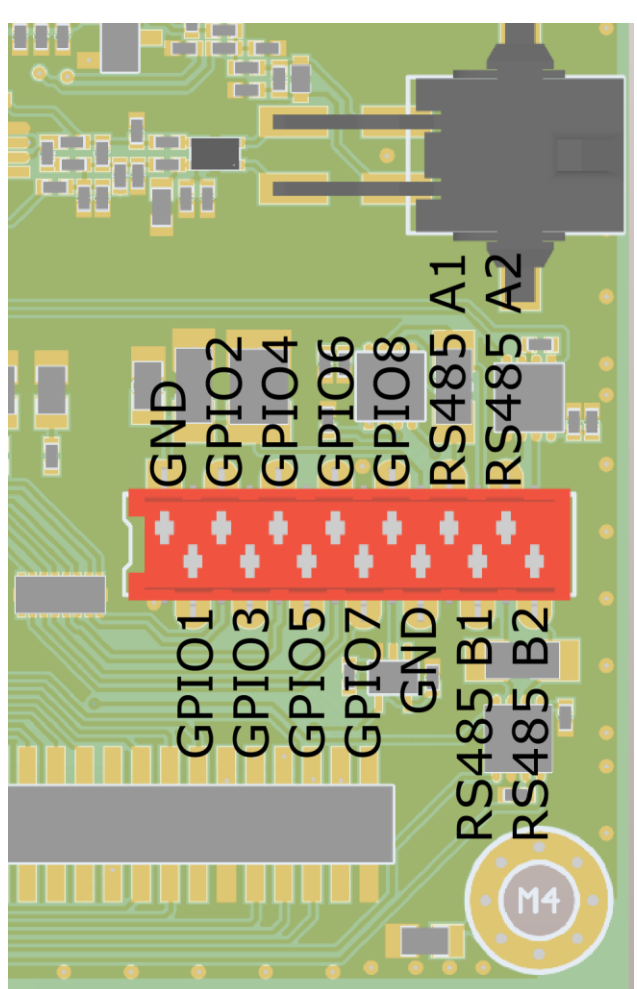


Interlock Connector X16

| ILock X16 | |
|---|--|
|  | <p>To enable the LDD apply a voltage between 3V and 30V between the Interlock + and Interlock – Pins. The Interlock Pins are galvanically isolated from the LDD.</p> <p>The DIP-Switch S2 can be switched ON to override the Interlock functionality.</p> <p>Connector: Molex 0022013027</p> |

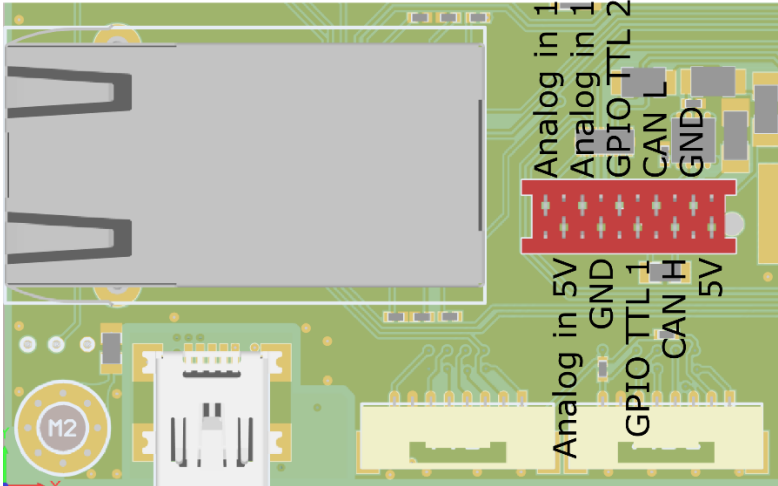
| Pin nr. | Name | Description |
|---------|-------------|-------------------------------|
| 1 | Interlock + | Interlock positive connection |
| 2 | Interlock - | Interlock negative connection |

Pin Configuration Platform Bus Connector (PBC) X7

| Mini-Module Plug | Connector: |
|--|---|
|  | <p>MICRO-MATCH SMD FTE Part Number: 8-188275-4 Number of Positions: 14 Centerline (Pitch): 1.27 mm [.05 in]</p> |

| Pin nr. | Name | Description |
|---------|----------|--|
| 1 | GND EXT | Ground connection |
| 2 | GPIO 1 | General-purpose input/output Pin 1 |
| 3 | GPIO 2 | General-purpose input/output Pin 2 |
| 4 | GPIO 3 | General-purpose input/output Pin 3 |
| 5 | GPIO 4 | General-purpose input/output Pin 4 |
| 6 | GPIO 5 | General-purpose input/output Pin 5 |
| 7 | GPIO 6 | General-purpose input/output Pin 6 |
| 8 | GPIO 7 | General-purpose input/output Pin 7 |
| 9 | GPIO 8 | General-purpose input/output Pin 8 |
| 10 | GND EXT | Ground connection |
| 11 | RS485 A1 | RS485 interface nr. 1A (TX-/RX- or D-) |
| 12 | RS485 B1 | RS485 interface nr. 1B (TX+/RX+ or D+) |
| 13 | RS485 A2 | RS485 interface nr. 2A (TX-/RX- or D-) |
| 14 | RS485 B2 | RS485 interface nr. 2B (TX+/RX+ or D+) |

Pin Configuration Auxiliary Communication and GPIOs (AUX) X10

| Mini-Module Plug | |
|---|---|
|  | <p>Connector: Würth Elektronik MiniModule Connector WR-MM Part Number: 690367181072 Number of Positions: 10</p> |

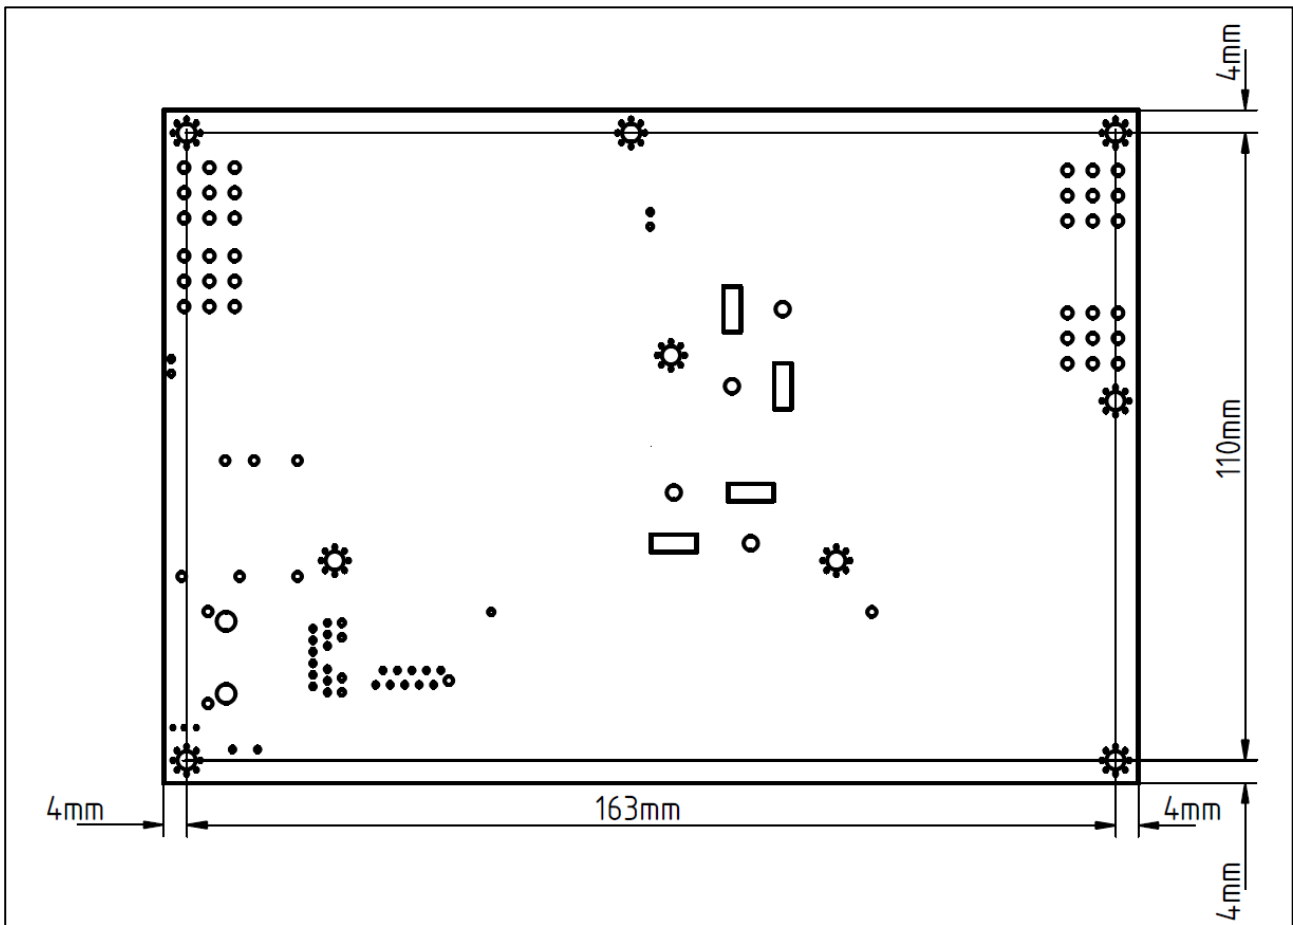
| Pin nr. | Name | Description |
|---------|---------------|--------------------------------------|
| 1 | 5V | 5V Output |
| 2 | GND | Ground connection |
| 3 | CANH | CAN High |
| 4 | CANL | CAN Low |
| 5 | GPIO TTL 1 | General-purpose input with TTL Level |
| 6 | GPIO TTL 2 | General-purpose input with TTL Level |
| 7 | GND | Ground connection |
| 8 | Analog In 1V | Analog Input 0-1V range |
| 9 | Analog In 5V | Analog Input 0-5V range |
| 10 | Analog In 10V | Analog Input 0-10V range |

Mini USB Connector X15

The Mini USB Connector X15 can be used to communicate with the LDD using the meCom communications protocol or the Configuration Software. It is electrically isolated.

Dimensions

Top View



Mounting holes in the corner are 3.2 mm holes for M3 screws.

Pulse and CW comparison

| | CW | Pulse |
|--------------------------------|-----------|--------------|
| CW operation | Yes | Yes |
| Signal generator Pulses | Yes | Yes |
| CW chopping | No | Yes |
| Ripple | Less | Normal |

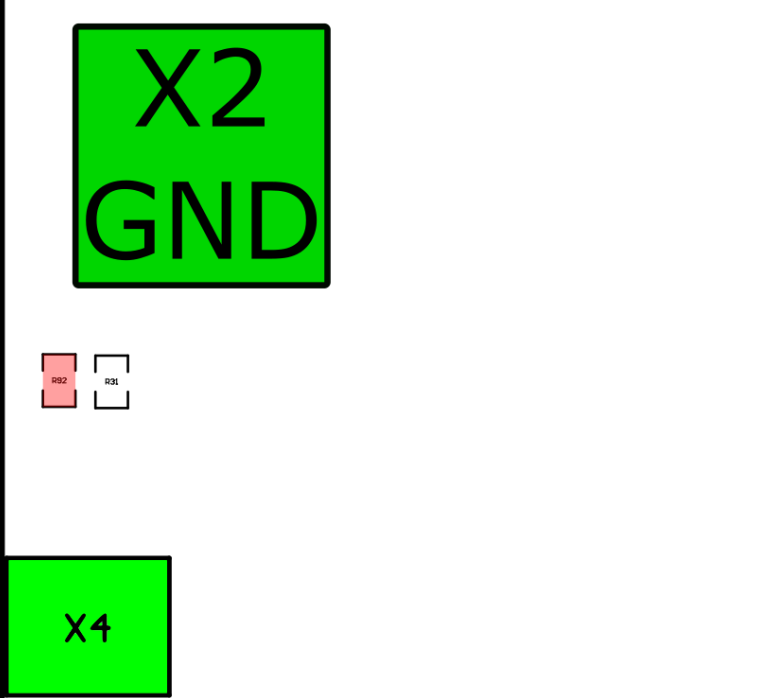
The Pulse version is recommended if risetimes below 100 us are desired.

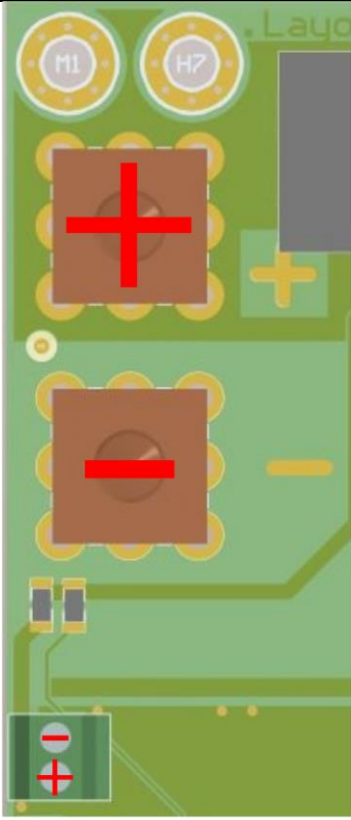
The Pulse version can be operated exactly like the CW version, or by using the dedicated Pulse functions. The dedicated pulse functions utilize CW-chopping to achieve faster pulses. The Pulse version also contains less output filters, which enables faster risetimes while slightly increasing the ripple.

Note: the graph in the Configuration Software displays the high-side current measurement, therefore chopped pulses cannot be observed properly in the graph as the current keeps flowing internally during chopping.

Separate supply for Power and Digital parts

The device supports supplying the power and digital sections separately.

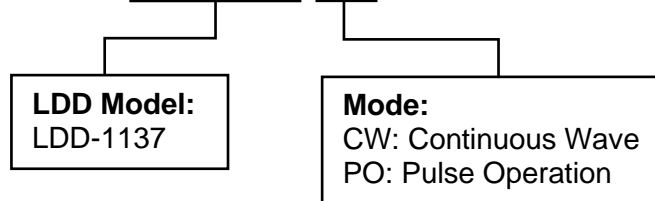
| Preparation | |
|--|---|
|  | <p>R92 (marked red) must be removed. X4 can then be used to provide power only to the digital part of the LDD.</p> <p>X4 can either be used to directly attach the supply via soldering or to solder a pin header or screw connector.</p> |


| X4 | |
|--|---|
| <p>Power</p> <p>GND</p> <p>GND Digital</p>  | <p>Power requires a Voltage between 18-75V. This supplies the Power electronics of the LDD.</p> <p>Digital supplies the logic part of the LDD and requires 18-75V. The digital part requires <5W of power.</p> <p>GND is shared between both supplies.</p> |

Ordering Information

LDD-1137 Ordering Information, Hardware Configuration

Example Configuration: **LDD-1137-CW**



| | | |
|---|--|---|
| Meerstetter Engineering GmbH Schulhausgasse 12 3113 Rubigen, Switzerland |  <small>Member of Berndorf Group</small> | +41 31 529 21 00 contact@meerstetter.ch Website: www.meerstetter.ch |
| Meerstetter Engineering GmbH (ME) reserves the right to make changes without further notice to the product described herein. Information furnished by ME is believed to be accurate and reliable. However typical parameters can vary depending on the application and actual performance may vary over time. All operating parameters must be validated by the customer under actual application conditions. | | |

Change History

| Date of change | Doc/Version | Changed / Approved | Change / Reason |
|-----------------|-------------|--------------------|---|
| 4 March 2021 | B | PV / MR | <ul style="list-style-type: none">• Add Change History• First prototype measurement data inserted• New layout template used |
| 2 December 2021 | C | PV / RS | <ul style="list-style-type: none">• New HW v1.20 changes• High power warning• Measurement plots |