




*This product is sold  
and supported  
in the USA by*



**LASER LAB SOURCE**  
marketplace for **Scientists & Engineers**

**[contact@LaserLabSoure.com](mailto:contact@LaserLabSoure.com)**

**800.887.5065**

### Diode driver (QCW / CW)



#### Information

- Designed to power the diode arrays used to pump high-power solid-state or fiber lasers.
- Optimized for use as part of laboratory, educational, experimental and industrial applications.
- In addition, it can be equipped with a controller of thermal stabilization of Peltier elements (TEC controller).
- It has current limit, duty cycle limit and safety interlocks.
- It is modified according to customer requirements for optimal selection of parameters for a specific load.


#### Specifications

	SF530-120/20	SF530-80/30	SF530-60/40	SF530-40/60	SF530-30/80	SF530-20/120
<b>- Pulse (QCW) mode -</b>						
Pulse rate* (F)	1-500 Hz, single mode					
Output voltage* (V)	0-20V	0-30V	0-40V	0-60V	0-80V	0-120V
Output current* (I)	1-240A	1-160A	1-120A	1-80A	1-60A	1-40A
Pulse duration* ( $\tau$ )	50-1000 $\mu$ s					
Rise time**	<60 $\mu$ s					
Fall time**	<60 $\mu$ s					
<b>- CW mode -</b>						
Output voltage* (V)	0-20V	0-30V	0-40V	0-60V	0-80V	0-120V
Output current* (I)	1-120A	1-80A	1-60A	1-40A	1-30A	1-20A
<b>- General characteristics -</b>						
Output current tolerance	0.3 %					
Average output power* (P)	2.4 kW					
Data display	LCD					
Communication interface	RS232, RS485 (optional)					
Trigger in	5 V, 10 $\mu$ s					
Trigger out	5 V, 10 $\mu$ s					
Interlock	switch contact closure					
Cooling	air cooled					
Power Input	single phase 220 VAC, 50Hz					
Dimensions	440*132*440 mm; 3U					
Weight	20 kg					

\* Values are limited by average power:  $F \cdot V \cdot I \cdot \tau \leq P$  (pulse mode);  $V \cdot I \leq P$  (CW mode)

\*\*With a length of laser diode power wire is not more than 2m


### Dimensions

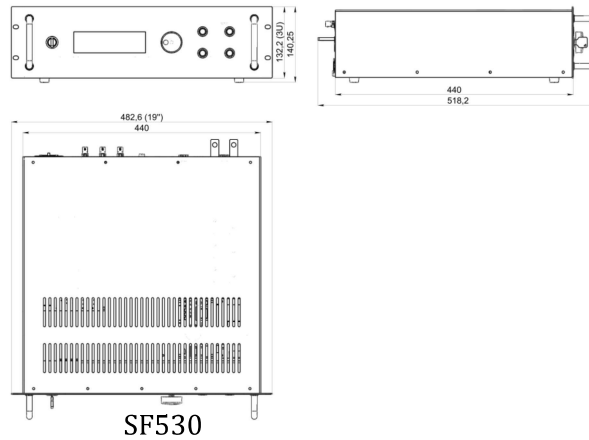


### Examples of laser diode arrays

## II-VI

Laser II-VI




BPC/OPC40W,60W& 80W — 92A 1,8V  
 BPC/OPC80W — 81A 1,65V  
 HPC50W — 54A 1,65V  
 Monsoon Compact framed vertical stack module  
 Monsoon Frameless Vertical Stack Module  
 Compact Bar on Microchannel cooler and etc.



808nm150W - 11A 40V / 915nm150W — 13,5A 24V  
 915nm158W - 11A 36V / 915nm200W — 13,5A 35V  
 940nm150W - 14A 24V / 940nm200W — 14A 35V  
 976nm150W - 14A 23,8V / 976nm200W — 14A 35V  
 976nm100W - 11,5A 24V / 976nm140W — 14A 23,8V  
 976nm180W - 14A 35V  
 915/940/976nm на 600W / 1000W / 2000W / 3000W and etc.



Vshiny FL-HVS61-6X1-360-760 — 80A 15V  
 Vshiny FL-HVS61-6X1-600-1060 — 115A 2V  
 Vsilk FL-1200-1000-808 — 110A 20V and etc.



Emitter of injection lasers IL-1M2  
 KMLD-130 — 65A 6V  
 32DL-504 / LLD-10  
 SLM-7 / SLM-P-8N  
 SLMP-6HII / LLD-500-1 and etc.