




OsTech Connecting Cable, 80 Amps 5-Pin Sub-D5W5 -- Cable Lugs

SPECIFICATIONS

- Connector A: 5-Pin Sub-D5W5 (male)
- Connector B: Cable Lugs
- Three Length Options: 1.3m, 2.5m, 5m
- Current Capacity: 40 A per pin (80 A per lead)
- Wire Gauge: 10 mm²



Laser Connector Cable

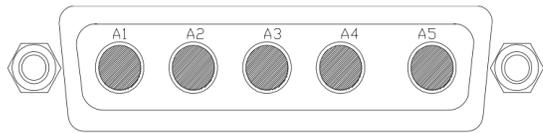

Sub-5W5, male Type

PIN.No	Abbr.	Function referring to OsTech driver layout
A3;A4	LDA+	Laser Diode Anode (+), cable-core
A1;A2	LDC-	Laser Diode Cathode (-), cable-screen
A5	n.c.	

Part Number: kab-141-x;
x = 1.3, 2.5, 5.0 (length, in meters)